
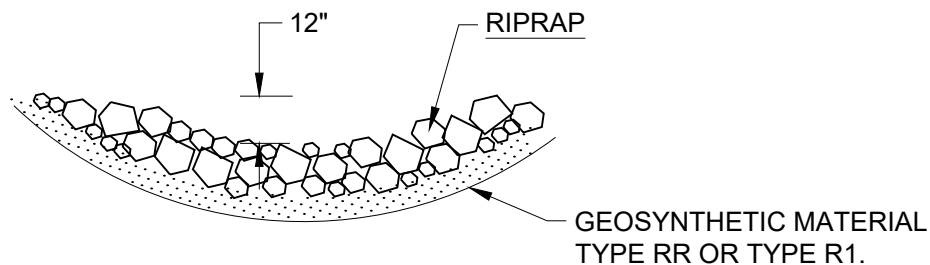


NOTES:

1. RIPRAP SIZE, QUANTITY, PLACEMENT, AND DIMENSIONS SHALL BE PER THE PLANS.
2. CONSTRUCT CUTOFF WALL 4' WIDER THAN END SECTION.
3. REBAR CENTERED WITHIN THE CUTOFF WALL SHALL BE #4 @ 12" O.C. BOTH HORIZONTAL AND VERTICAL.
4. A 1/4" MIN. STEEL PLATE MAY BE BOLTED TO THE FACE OF THE BOTTOM OF THE END SECTION WITH STAINLESS STEEL ANCHOR BOLTS AS A SUBSTITUTE FOR THE CONCRETE CUTOFF WALL. THE PLATE SHALL BE 4' DEEP AND 4' WIDER THAN THE END SECTION.

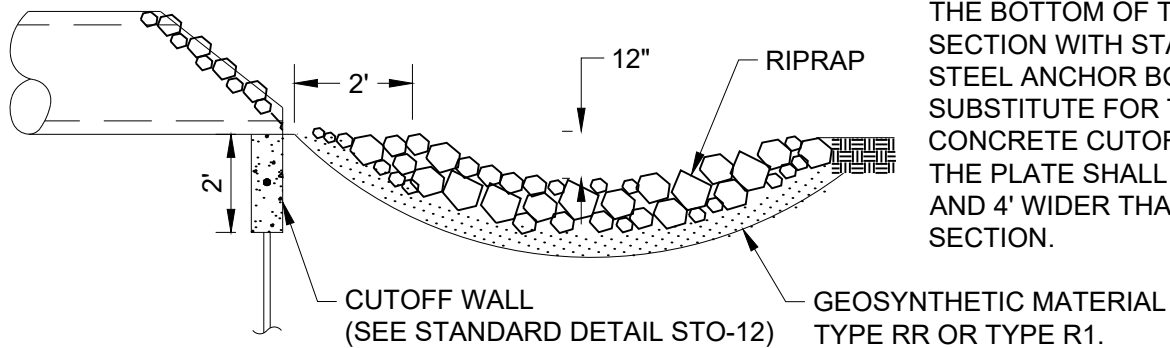

City Plate No.:

STO-11

Last Revision:

12/18/2020

Section:

2700

STANDARD DETAILS

STABILIZED OUTFALL

City of Minot